


MONOBLOK R290 TOPLLOTNE PUMPE

vazduh - voda

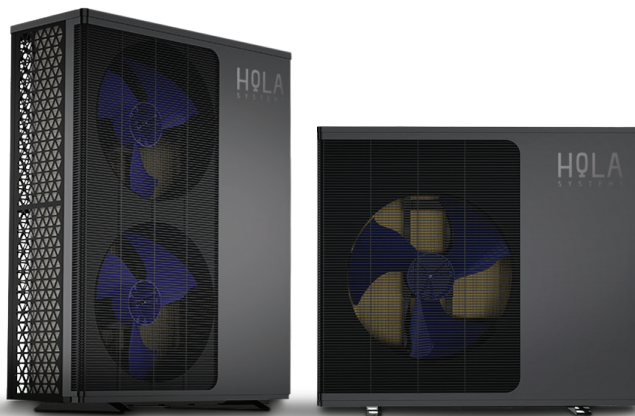

Model	PW030-DKZLRS-E/S	PW040-DKZLRS-E/S	PW050-DKZLRS-E/S	PW050-DKZLRS-E	PW060-DKZLRS-E
Jačina toplotne pumpe Snaga na izlazu	8.3 KW	11.4 KW	14.8 KW	14.8 KW	22 KW
Cena (sa PDV-om)	470.000,00	590.000,00	810.000,00	820.000,00	855.000,00
GREJANJE - Spoljna temperatura (DB/VB) 7/6°C, Temperatura vode (ulaz/izlaz): 30/35°C					
Opseg grejnog kapaciteta (kW)	3.3~8.3	4.5~11.4	5.9~14.8	5.9~14.8	8.8~22.0
Opseg ulazne snage grejanja (kW)	0.64~2.18	0.85~2.95	1.13~3.83	1.13~3.83	1.68~5.77
SCOP	3.81~5.17	3.86~5.29	3.86~5.22	3.86~5.22	3.81~5.24
Stanje grejanja - Spoljna temperatura (DB/VB) 7/6°C, Temperatura vode (ulaz/izlaz): 15/55°C					
Opseg grejnog kapaciteta (kW)	3.7~7.4	5.2~10.2	6.6~13.2	6.6~13.2	7.8~17.6
Opseg ulazne snage grejanja (kW)	0.79~2.10	1.10~2.87	1.41~3.73	1.41~3.73	1.67~5.01
SCOP	3.52~4.69	3.55~4.71	3.54~4.67	3.54~4.67	3.51~4.66
Izlaz zagrejjane vode (L/H)	159	219	283	283	377
Stanje PTV - Spoljna temperatura (DB/VB) 35/24°C, Temperatura vode (ulaz/izlaz): 12/7°C					
Raspon kapaciteta hlađenja (kW)	2.4~5.8	3.3~8.2	4.3~10.8	4.3~10.8	6.2~15.3
Raspon ulazne snage hlađenja (kW)	0.79~2.19	1.08~3.07	1.39~3.99	1.39~3.99	1.99~5.60
EER - odnos snage hlađenja	2.65~3.04	2.67~3.06	2.71~3.10	2.71~3.10	2.73~3.12
ErP nivo (35°C)	A+++	A+++	A+++	A+++	A+++
Rashladno sredstvo	R290				
Napajanje	230V/1Ph/50Hz/60Hz			380V/3Ph/50-60Hz	
Prečnik cevi (mm)	DN25	DN25	DN25	DN25	DN25
Maksimalna visina voda (m)	9	9	9	9	12
Buka dB(A)	≤47	≤50	≤52	≤52	≤53
Neto težina (kg)	108	120	132	132	170
Neto dimenzija (D/Š/V) mm	1080×460×820	1080×460×960	1080×480×1060	1080×480×1060	1080×480×1372
Radna temperatura okoline. (°C)	-25~43				
Radna temperatura vode (°C)	20~65(DHW)				
Radna temperatura vode (°C)	20~75(GREJANJE)				
Radna temperatura vode (°C)	7~35(HLAĐENJE)				